



2/2-way-Globe Valve with stainless steel design for media up to +185 °C, DN 15-100

- High cycle life
- Flow optimised body in stainless steel 316L
- Deliverable with flow direction below or above seat
- Clean design for optimal use in hygienic environment
- Suitable for steam up to 10 bar(g)

Type 2101 can be combined with...



Type 8691

Control Head



Type 8695

Control Head



Type 8690

Pneumatic Control Unit



Type 8697

Pneumatic Control Unit



Type 8619

MultiCELL Transmitter/Controller



Type 8222

Conductivity transmitter

In line with Bürkert's philosophy for modular valves and sensors the construction of the 2101 globe valve fulfils tough criteria for process environments. Unrivalled cycle life and sealing integrity is guaranteed by the proven self adjusting spindle packing with V-seals.

The design enables the easy integration of automation modules whether they are electrical/optical position feedback, pneumatic control units, an integrated fieldbus interface.

The fully integrated system has a compact and smooth design, integrated pneumatic lines, IP65/67 protection class and superior chemical resistance.

Optionally, an explosion-proof version is also available

Technical data	
Orifice	DN15 to DN100
Port connections Flange acc. to Welded and threaded	DIN EN 1092-1, ANSI B16.5, JIS 10K on request
Body material	Cast stainless steel 316L
Nominal pressure	PN25 (Body)
Actuator material Actuator / Cover	PPS / Stainless steel 1.4561 (316Ti)
Sealing material	PTFE
Medium	Water, alcohol, oils, fuels, hydraulic fluids, salt solution, alkali solutions, organic solvents, steam optional fuel gas (EC Gas Appliances Directive 2009/142/EG)
Viscosity	max. 600 mm ² /s
Spindle packing	PTFE V-rings with spring compensation
Medium temperature	-10 to +185 °C
Ambient temperature	0 to +55 °C (integrated control head) 0 to +60 °C (push-in air ports)
Control medium	Neutral gases, air
Max. pilot pressure	max. 10 bar; actuator size 130 mm, 7 bar
Pilot air ports	Push-in connector for external ø 6 mm or 1/4" tube, thread G1/8 (on request)
Installation	As required, preferably with actuator in upright position

Content



Valve specifications

Type 2101

Technical data & ordering info. p. 1-8



System spec. On/Off ELEMENT

Type 8801-GC



Technical data & ordering info. p. 9-16

Request for quotation

Type 8801-GC

p.15

Technical data globe valve Type 2101 flow direction below the seat (for gases and liquids)

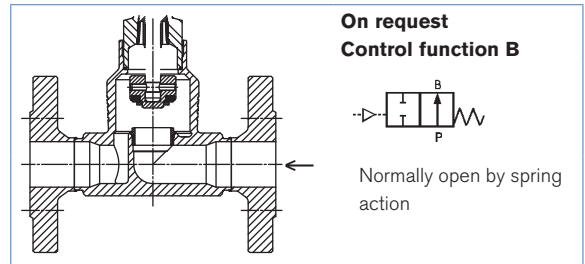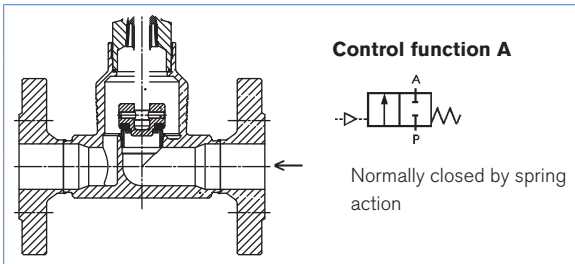

Orifice [mm]	Actuator size [mm]	Kv value water (m³/h)	Minimum pilot pressure CFA [bar]	Operating pressure up to +185°C	
				CFA [bar]	On request :CFB [bar]
15	50	4.7	4.8	25	16
	70	4.7	4.8	25	16
20	50	8.1	4.8	16	16
	70	8.1	4.8	20	16
25	50	13	4.8	9	14.5
	70	13	4.8	16	16
32	70	19.5	4.8	8.5	16
	90	19.5	5.0	16	16
40	70	31	4.8	6	16
	90	31	5.0	16	16
50	70	45	-	-	16
	90	45	5.0	10	16
	130	45	5.0	16	-
65	90	73	5.0	5	14
	130	73	5.6	16 (15*)	16 (15*)
80	130	110	5.6	10	11
100	130	165	5.6	6	7


Flow rate: Kv value water [m³/h]: Measured at +20°C, 1 bar pressure at valve inlet and free outlet.

Pressure valves [bar]: Overpressure to the atmospheric pressure

* acc. to the Pressure Equipment Directive 97/23 / EC for compressible fluids in Group 1 (hazardous gases and vapors in accordance with Article 3, Section 1.3, letter a, first dash)


On request control function B

Pressure charts with control function B and flow direction below the seat

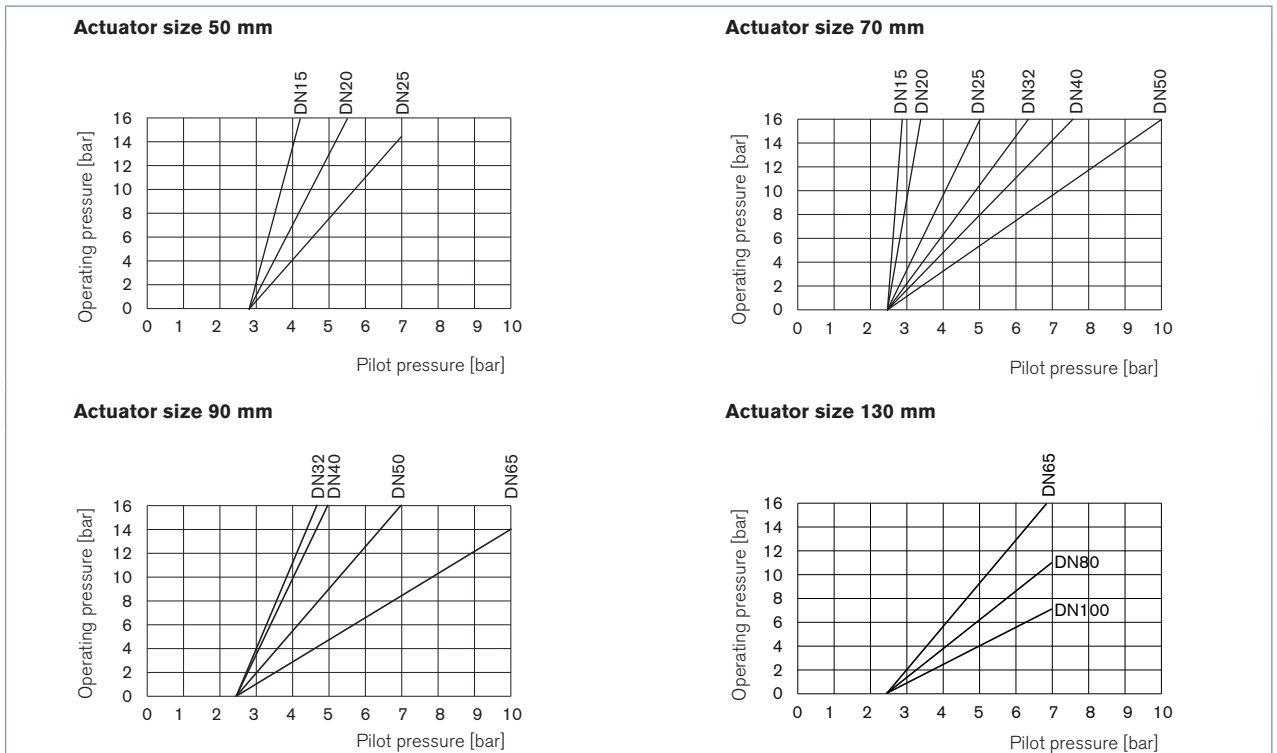


Ordering chart Type 2101, flow direction below the seat (for gases and liquids)


Flange connection acc. to DIN EN 1092-1, flow direction below the seat

Control function	Orifice (mm)	Actuator size ϕ [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.	Item no. certified Atex II 2GD Mechanical
A 2/2-way valve. NC 	15	50	5.2	25	203 076	260 092
	20	50	5.2	16	203 077	260 093
		70	4.8	20	203 078	260 094
	25	50	5.2	9	203 079	260 095
		70	4.8	16	189 700	260 096
	32	70	4.8	8.5	203 080	260 099
		90	5.0	16	203 081	260 100
	40	70	4.8	6	203 082	260 101
		90	5.0	16	203 083	260 103
	50	90	5.0	10	203 084	260 104
		130	5.0	16	218 418	260 106
	65	90	5.0	5	239 524	260 107
		130	5.6	16 (15*)	219 533	260 109
	80	130	5.6	10	239 528	260 110
100	130	5.6	6	239 531	260 144	

Flange connection acc. to ANSI B16.5, flow direction below the seat

Control function	Orifice (mm)	Actuator size ϕ [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.
A 2/2-way valve. NC 	15	50	5.2	25	203 095
	20	50	5.2	16	203 086
		70	4.8	20	203 097
	25	50	5.2	9	203 098
		70	4.8	16	203 099
	40	70	4.8	6	203 100
		90	5.0	16	203 101
	50	90	5.0	10	203 102
		130	5.0	16	218 419
	65	90	5.0	5	239 525
		130	5.6	16 (15*)	239 527
	80	130	5.6	10	239 529
	100	130	5.6	6	239 532

Flange connection acc. to JIS 10K, flow direction below the seat

Control function	Orifice (mm)	Actuator size ϕ [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.
A 2/2-way valve. NC 	15	50	5.2	25	203 111
	20	50	5.2	16	203 112
		70	4.8	20	203 113
	25	50	5.2	9	203 114
		70	4.8	16	203 115
	40	70	4.8	6	203 118
		90	5.0	16	203 121
	50	90	5.0	10	203 122
		130	5.0	16	218 471
	65	90	5.0	5	239 526
		130	5.6	16 (15*)	219 537
	80	130	5.6	10	239 530
	100	130	5.6	6	239 533

* acc. to the Pressure Equipment Directive 97/23 / EC for compressible fluids in Group 1 (hazardous gases and vapors in accordance with Article 3, Section 1.3, letter a, first dash)


 Further versions on request
**Control function**

B (normally open) and I (double-acting)

**Port connection**

Welded and threaded ports

Technical data globe valve Type 2101 flow direction above the seat (for gases and steam)

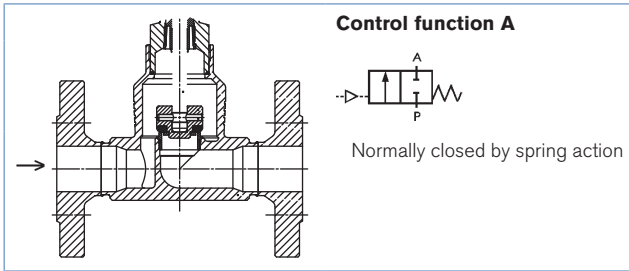

Attention!


Valves with flow above the seat are only conditionally usable for liquid medium. There is a danger of waterhammer!

Orifice [mm]	Actuator size [mm]	Kv value water (m³/h)	Operating pressure up to +185°C CFA [bar]
15	50	4.7	16
	70	4.7	16
20	50	8.1	16
	70	8.1	16
25	50	13	16
	70	13	16
32	70	19.5	16
40	70	31	16
	90	31	16
50	70	45	12
	90	45	16

Flow rate: Kv value water [m³/h]: Measured at +20°C, 1 bar pressure at valve inlet and free outlet.


Pressure valves [bar]: Overpressure to the atmospheric pressure

Pressure charts with control function A and flow direction above the seat

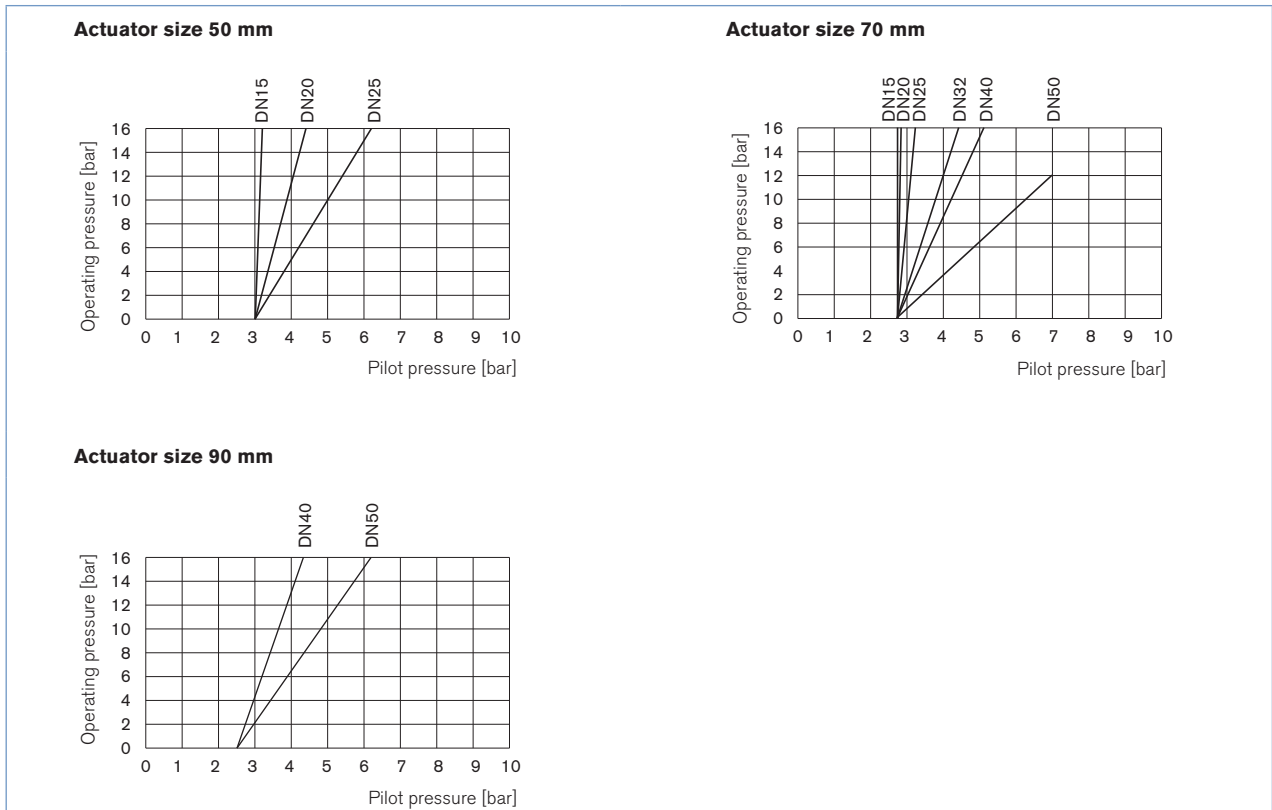


Ordering chart Type 2101 flow direction above the seat (for gases and steam)


Flange connection acc. to DIN EN 1092-1, flow direction below the seat

Control function	Orifice (mm)	Actuator size \varnothing [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.	Item no. certified Atex II 2GD Mechanical
A 2/2-way valve. NC 	15	50	see chart on p. 4	16	203 086	260 145
	20	50		16	203 087	260 146
	25	50		16	203 088	260 151
	32	70		16	203 091	260 153
	40	70		16	203 092	260 154
	50	70		12	204 973	260 157
		90		16	203 094	260 158

Flange connection acc. to ANSI B16.5, flow direction below the seat

Control function	Orifice (mm)	Actuator size \varnothing [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.
A 2/2-way valve. NC 	15	50	see chart on p. 4	16	203 103
	20	50		16	203 104
	25	50		16	203 105
	40	70		16	203 107
	50	70		12	204 974
		90		16	203 109

Flange connection acc. to JIS 10K, flow direction below the seat

Control function	Orifice (mm)	Actuator size \varnothing [mm]	Minimum pilot pressure [bar]	Operating pressure up to +185°C [bar]	Item no.
A 2/2-way valve. NC 	15	50	see chart on p. 4	16	203 123
	20	50		16	203 124
	25	50		16	203 125
	40	70		16	203 127
	50	70		12	204 975
		90		16	203 129

i Further versions on request


Control function

B (normally open) and I (double-acting)


Port connection

Welded and threaded ports


Materials globe valve Type 2101

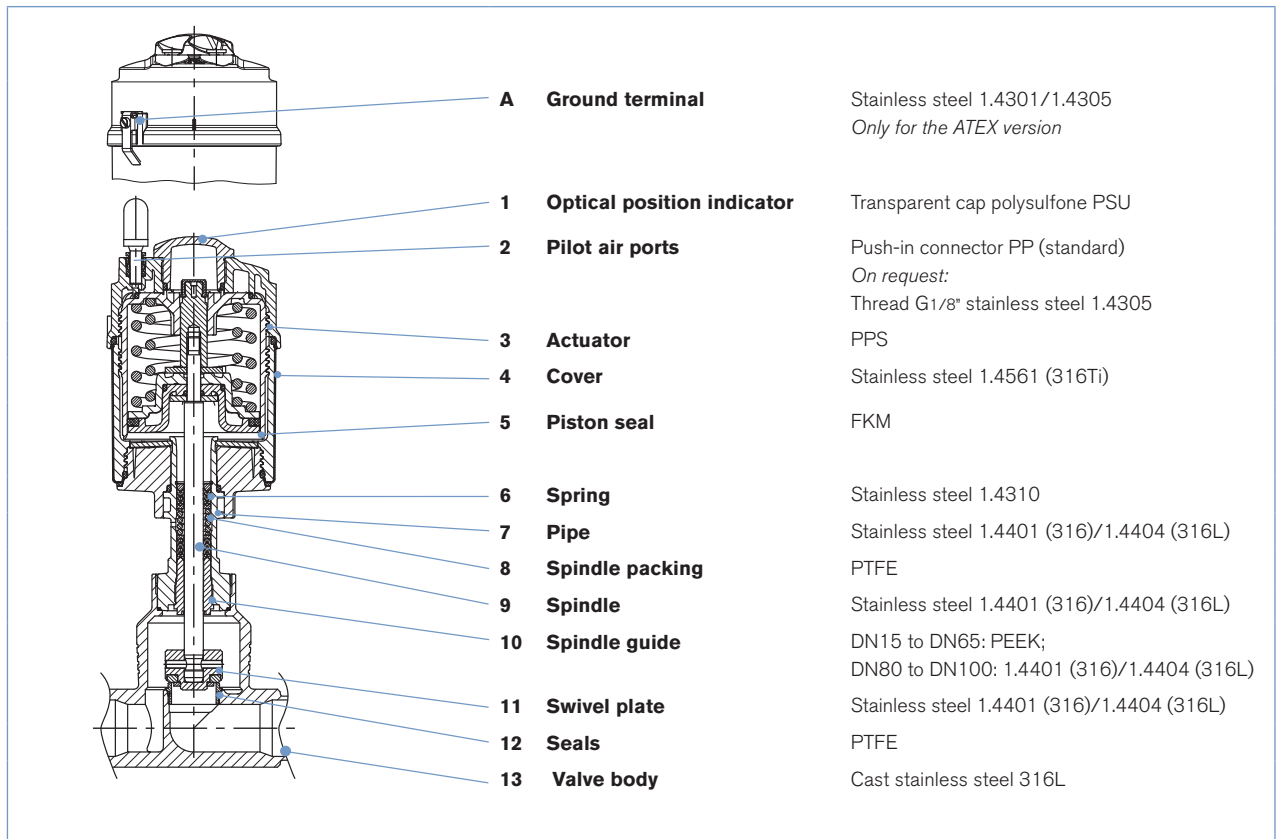

Lubricants for spindle packing and actuator are classified according NSF H1

Dimensions globe valve Type 2101 [mm]


Flanged body

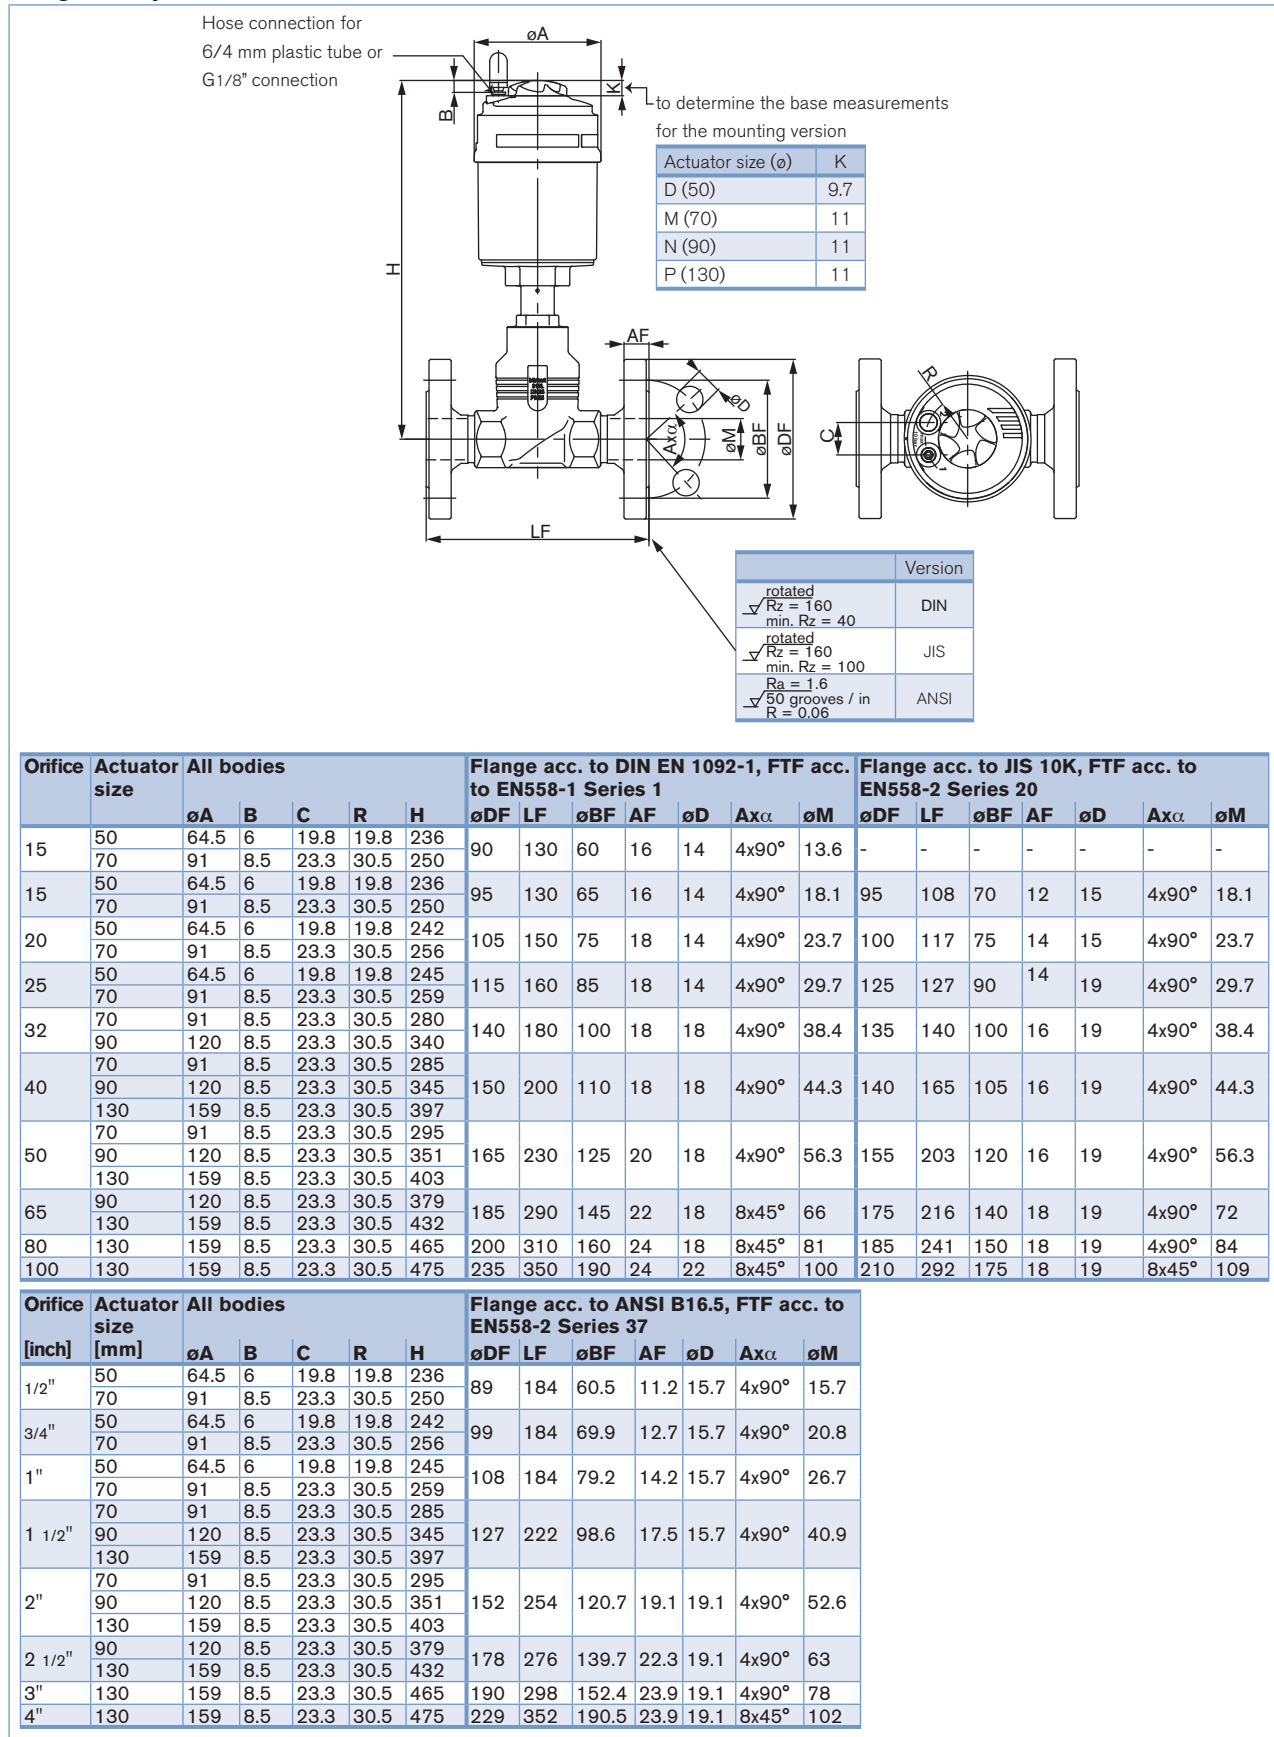

Dimensions globe valve Type 2101 [mm], *continued*

Threaded body

Hose connection for
6/4 mm plastic tube or
G1/8" connection

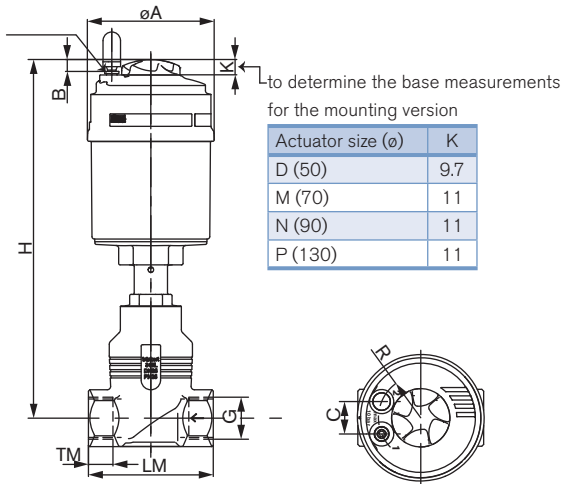


Orifice	Actuator size	All bodies						G		NPT		Rc	
		øA	B	C	R	H	LM	G	TM	G	TM	G	TM
15	50	64.5	6	19.8	19.8	236	65	G 3/8"	12	NPT 3/8"	10.3	Rc 3/8"	10.1
	70	91	8.5	23.3	30.5	250							
15	50	64.5	6	19.8	19.8	236	65	G 1/2"	14	NPT 1/2"	13.7	Rc 1/2"	13.2
	70	91	8.5	23.3	30.5	250							
20	50	64.5	6	19.8	19.8	242	75	G 3/4"	16	NPT 3/4"	14	Rc 3/4"	14.5
	70	91	8.5	23.3	30.5	256							
25	50	64.5	6	19.8	19.8	245	90	G 1"	18	NPT 1"	16.8	Rc 1"	16.8
	70	91	8.5	23.3	30.5	259							
32	70	91	8.5	23.3	30.5	280	110	G 1 1/4"	20	NPT 1 1/4"	17.3	Rc 1 1/4"	19.1
	90	120	8.5	23.3	30.5	340							
	70	91	8.5	23.3	30.5	285							
40	90	120	8.5	23.3	30.5	345	120	G 1 1/2"	22	NPT 1 1/2"	17.3	Rc 1 1/2"	19.1
	130	159	8.5	23.3	30.5	397							
	70	91	8.5	23.3	30.5	295							
50	90	120	8.5	23.3	30.5	351	150	G 2"	24	NPT 2"	17.6	Rc 2"	23.4
	130	159	8.5	23.3	30.5	403							
	70	91	8.5	23.3	30.5	295							
65	90	120	8.5	23.3	30.5	379	185	G 2 1/2"	26	NPT 2 1/2"	23.7	Rc 2 1/2"	26.7
	130	159	8.5	23.3	30.5	432							

Dimensions globe valve Type 2101 [mm], *continued*

Weld end body

Hose connection for
6/4 mm plastic tube or
G1/8" connection

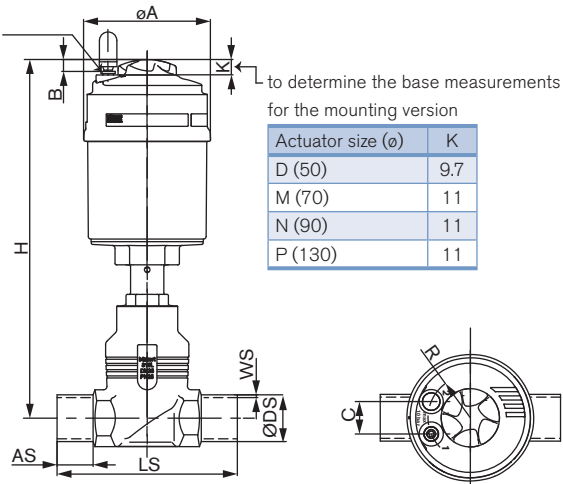


Orifice size	Actuator size	All bodies						ISO 4200		DIN 11850 R2		
		øA	B	C	R	H	AS	LS	ø DS	WS	ø DS	WS
15	50	64.5	6	19.8	19.8	236	20	90	17.2	1.6	13	1.5
	70	91	8.5	23.3	30.5	250						
15	50	64.5	6	19.8	19.8	236	20	90	21.3	1.6	19	1.5
	70	91	8.5	23.3	30.5	250						
20	50	64.5	6	19.8	19.8	242	20	10	26.9	1.6	23	1.5
	70	91	8.5	23.3	30.5	256						
25	50	64.5	6	19.8	19.8	245	26	130	33.7	2.0	29	1.5
	70	91	8.5	23.3	30.5	259						
32	70	91	8.5	23.3	30.5	280	26	140	42.4	2.0	35	1.5
	90	120	8.5	23.3	30.5	340						
	70	91	8.5	23.3	30.5	285						
40	90	120	8.5	23.3	30.5	345	26	150	48.3	2.0	41	1.5
	130	159	8.5	23.3	30.5	397						
	70	91	8.5	23.3	30.5	295						
50	90	120	8.5	23.3	30.5	351	26	175	60.3	2.0	53	1.5
	130	159	8.5	23.3	30.5	403						
	70	91	8.5	23.3	30.5	295						
65	90	120	8.5	23.3	30.5	379	26	210	76.1	2.3	70	2.0
	130	159	8.5	23.3	30.5	432						
	70	91	8.5	23.3	30.5	295						

Orifice size [inch]	Actuator size [mm]	All bodies						BS 4825 Part1		ASME BPE		
		øA	B	C	R	H	AS	LS	ø DS	WS	ø DS	WS
1/2"	50	64.5	6	19.8	19.8	236	20	90	12.7	1.2	12.7	1.65
	70	91	8.5	23.3	30.5	250						
3/4"	50	64.5	6	19.8	19.8	242	20	90	19.05	1.2	19.05	1.65
	70	91	8.5	23.3	30.5	256						
1"	50	64.5	6	19.8	19.8	245	20	100	25.4	1.6	25.4	1.6
	70	91	8.5	23.3	30.5	259						
	70	91	8.5	23.3	30.5	285						
1 1/2"	90	120	8.5	23.3	30.5	345	26	140	38.1	1.6	38.1	1.6
	130	159	8.5	23.3	30.5	397						
	70	91	8.5	23.3	30.5	295						
2"	90	120	8.5	23.3	30.5	351	26	150	50.8	1.6	50.8	1.6
	130	159	8.5	23.3	30.5	403						
	70	91	8.5	23.3	30.5	295						
2 1/2"	90	120	8.5	23.3	30.5	379	26	175	63.5	1.6	63.5	1.6
	130	159	8.5	23.3	30.5	432						


Dimensions for valve system On/Off ELEMENT Type 8801-GC [mm]

Dimensions valve system On/Off ELEMENT Type 8801-GC-K (with pneumatic control unit Type 8690)

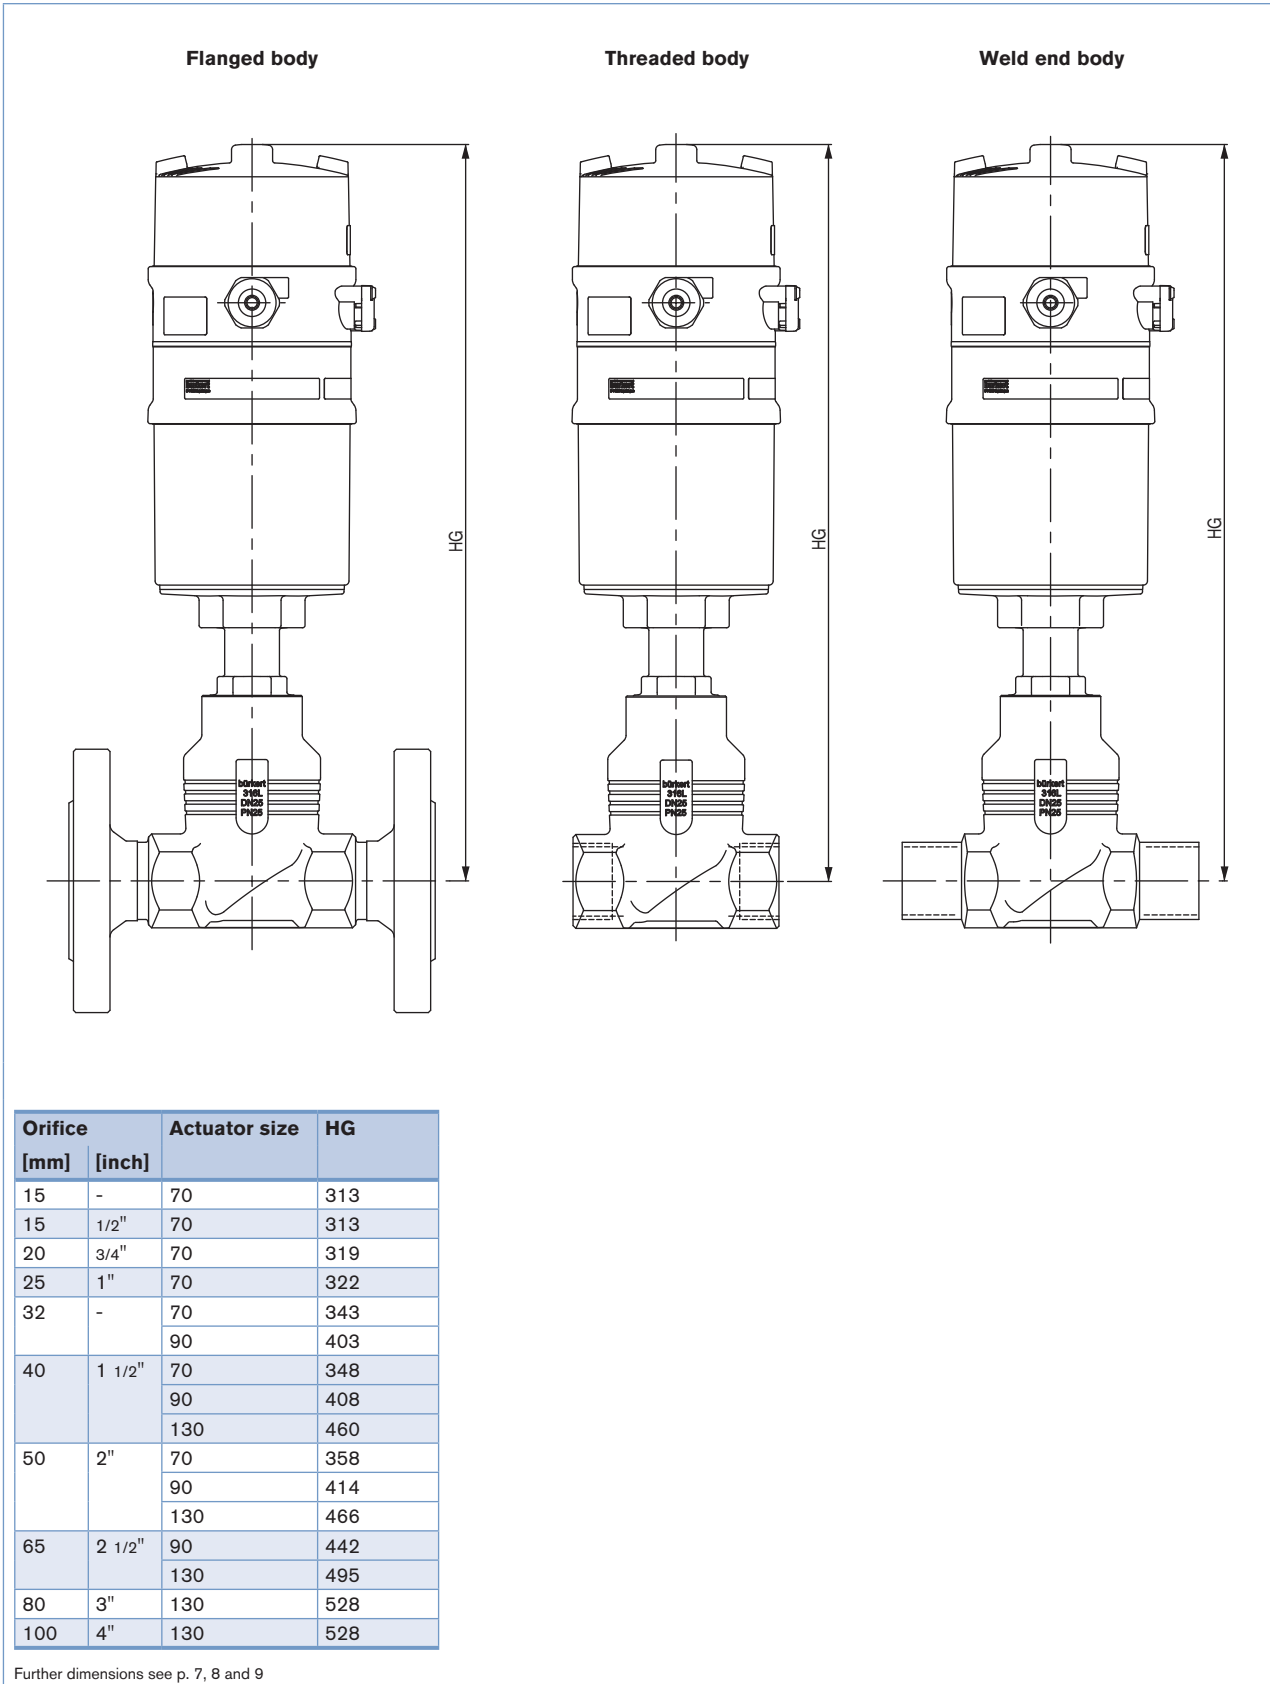


Dimensions for valve system On/Off ELEMENT Type 8801-GC [mm]

Dimensions valve system On/Off ELEMENT Type 8801-GC-H (with control head Type 8691)

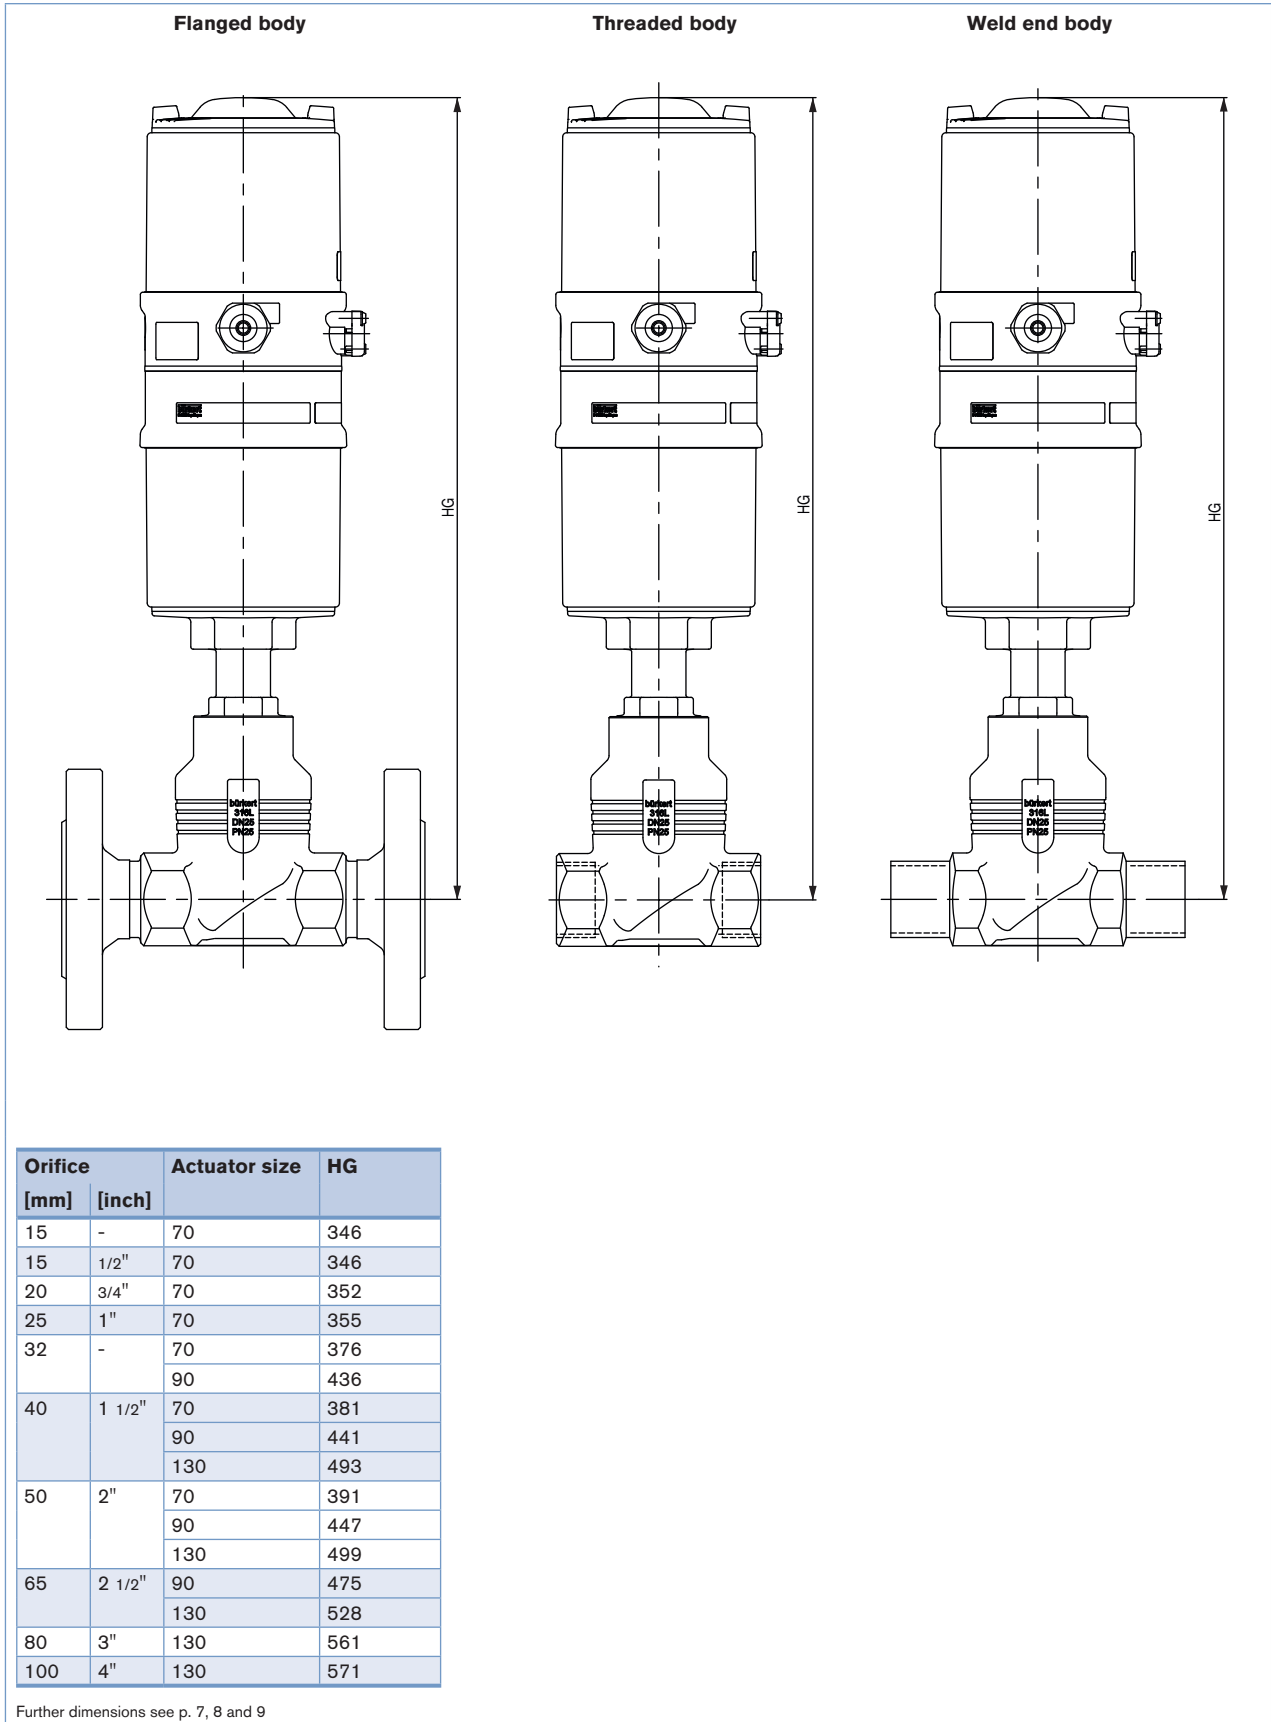

Dimensions for valve system On/Off ELEMENT Type 8801-GC [mm]

Dimensions valve system On/Off ELEMENT Type 8801-GC-M (with control head Type 8695)

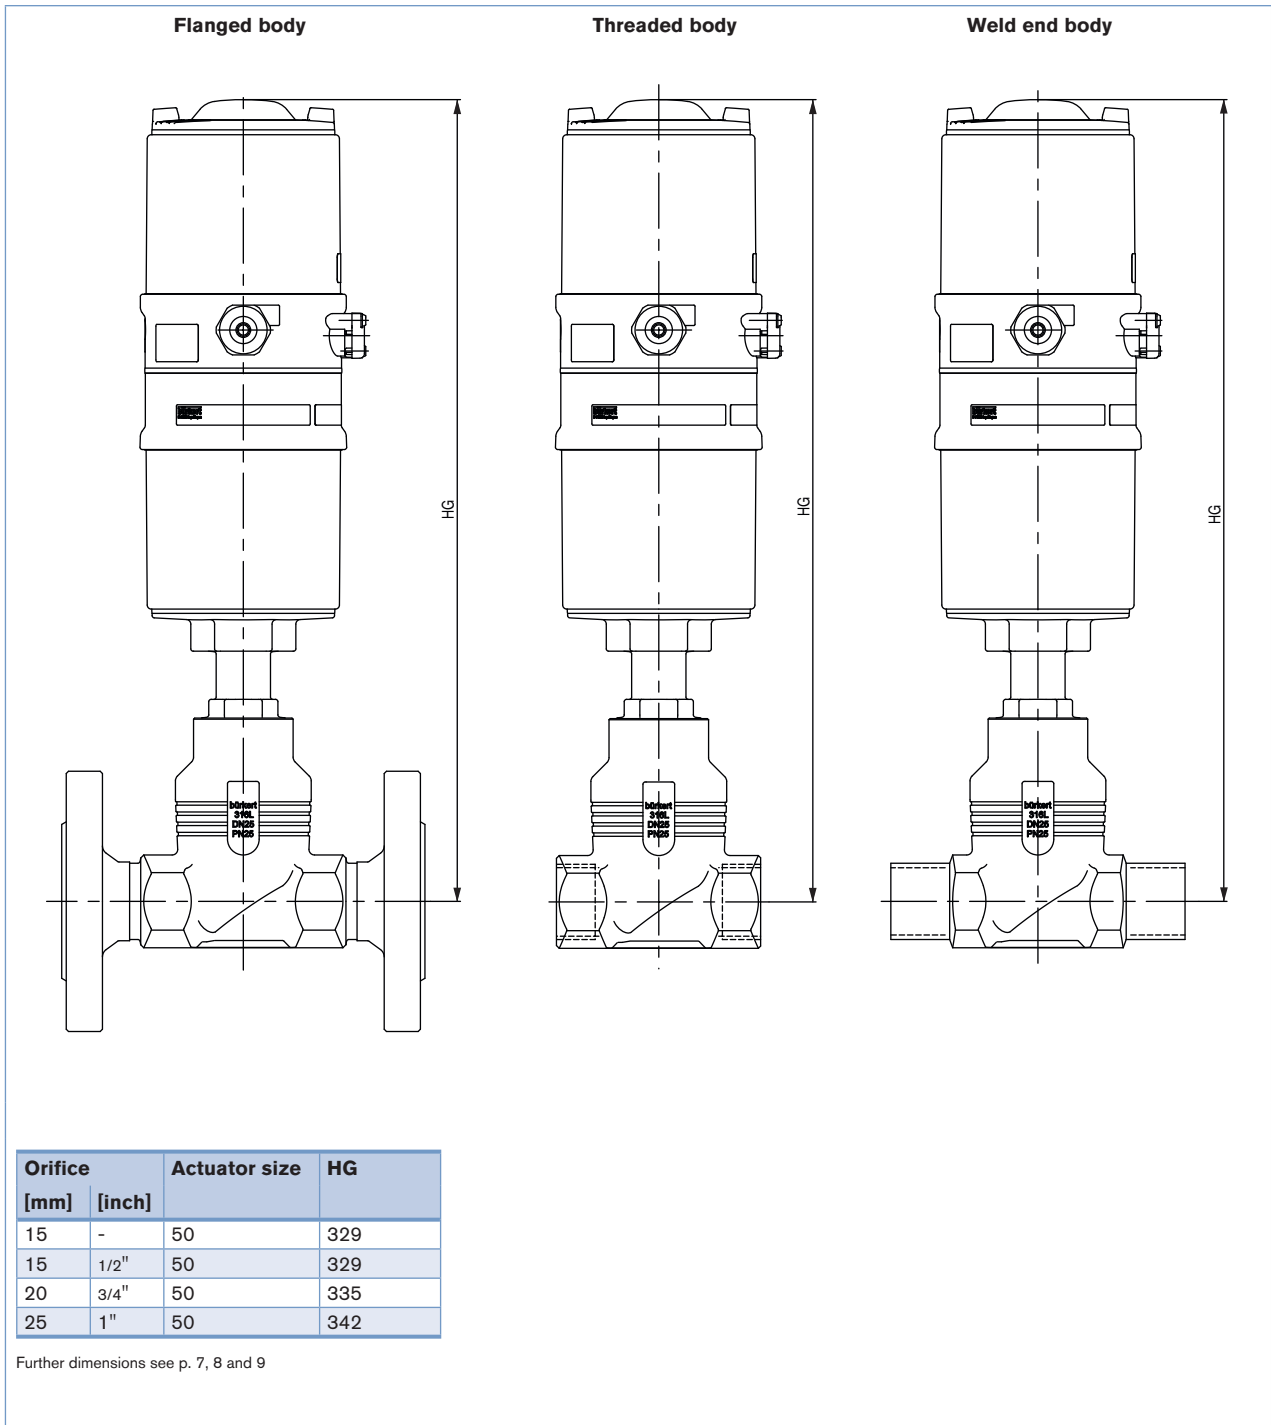

Dimensions for valve system On/Off ELEMENT Type 8801-GC [mm]

Dimensions valve system On/Off ELEMENT Type 8801-GC-U (with control head Type 8697)

